



FLAP WITH CONTROL

Kr, Ke, Kp 400r

Flap with Control produced by TAURUS, s.r.o., Chrudim, is designed for distribution of material technological flow in downstream transport routes of a line from containers, conveyors, and silos in feed mills and grain silos.

The flap is not intended for feeding materials!

It is used for integration into technological units for preparation of compound feedingstuffs for animals and similar industrial operations consisting of material storage equipment and connected technological equipment for processing of dry bulk materials.

Control: Manual-r, Electrical-e, Pneumatic-p.



Order number basis	Capacity t/h*	a	b	c	d	e	f	g	h	Basic weight kg
PK 1 2 1 x . x	200	400	400	-	-	480	-	-	500	49


Example: Flap type Kr 400r - Order number PK 121R.0

Flap output up to 200 t/h, installation dimensions 400x400, manual control



* Capacity is specified for wheat with volume density of 750 kg.m³ at humidity of up to 18%.



Basic Dimensions of the Machine

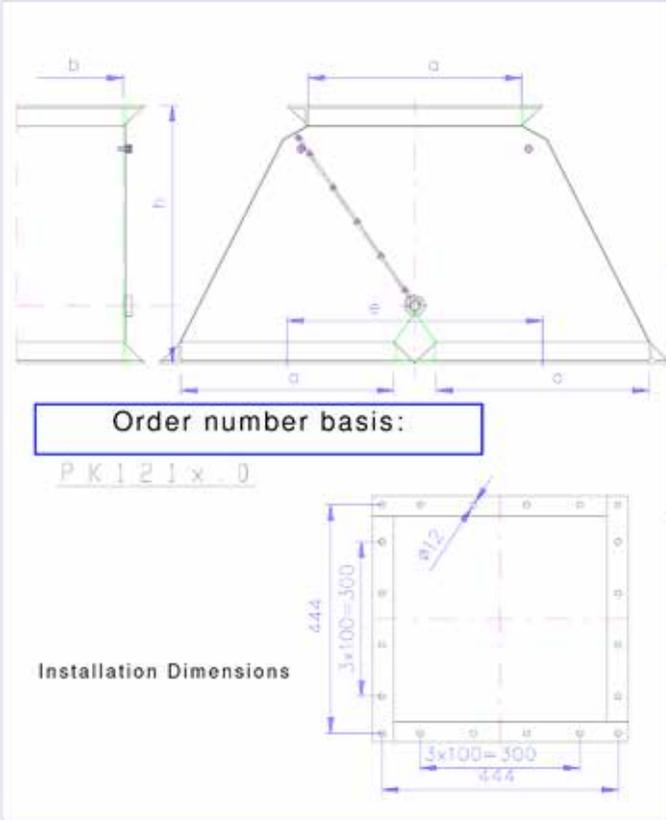

Manual control
Order No.: xxxR.x




Weight: 1.8 kg

Electrical control - power input up to 15 W
Order No.: xxxE.x



Weight: 3.8 kg

Pneumatic control
Air consumption 1.6 dm³/100 mm stroke
Order No.: xxxP.x



Weight: 6.0 kg